



# گروه فنی مهندسی جوش و برش مقدم

اعتماد از شما کیفیت و تخصص از ما



09153223758



051-37581400



<https://www.moghadamwelding>



<http://instagram.com/moghadam>



<https://t.me/moghadamwelding>



<https://whatsapp.com/channel>



<https://rubika.ir/moghadamwelding>



مشهد خیام شمالی 63 خیابان پردیس 3

برای کسب اطلاعات بیشتر بر روی لینک ها کلیک کنید

- 7 سال سابقه آموزش تعمیرات تخصصی دستگاه های جوش اینورتری تک فاز و 3 فاز
- 7 سال سابقه فروش قطعات الکترونیکی دستگاه جوش تک فاز و 3 فاز
- آموزش تخصصی تحلیل دستگاه های جوش اینورتری مختص ابزار فروشان
- آموزش تخصصی ابزار آلات شارژی

### 16 A, 500 V N-CHANNEL POWER MOSFET

#### DESCRIPTION



The UTC **16N50** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with planar stripe and DMOS technology. This technology allows a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC **16N50** is generally applied in high efficiency switch mode power supplies, active power factor correction and electronic lamp ballasts based on half bridge topology.

#### FEATURES

- \*  $R_{DS(ON)} < 0.38\Omega$  @  $V_{GS} = 10V$
- \* High Switching Speed
- \* 100% Avalanche Tested

#### SYMBOL

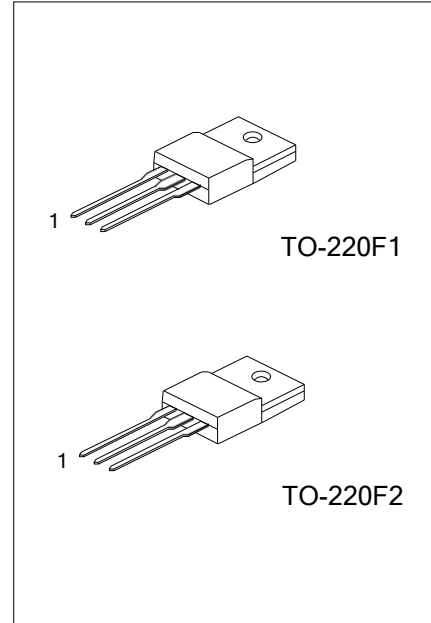

#### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
16N50L-TF1-T	16N50G-TF1-T	TO-220F1	G	D	S	Tube
16N50L-TF2-T	16N50G-TF2-T	TO-220F2	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

<p>16N50L-TF1-T</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Lead Free</p>	<p>(1) T: Tube</p> <p>(2) TF1: TO-220F1, TF2: TO-220F2</p> <p>(3) L: Lead Free, G: Halogen Free</p>
--	---

■ **ABSOLUTE MAXIMUM RATINGS** ( $T_C=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		$V_{DSS}$	500	V
Gate-Source Voltage		$V_{GSS}$	$\pm 30$	V
Drain Current	Continuous ( $T_C=25^\circ\text{C}$ )	$I_D$	16 (Note 2)	A
	Pulsed (Note 3)	$I_{DM}$	64 (Note 2)	A
Avalanche Current (Note 3)		$I_{AR}$	16	A
Avalanche Energy	Single Pulsed (Note 4)	$E_{AS}$	780	mJ
	Repetitive (Note 5)	$E_{AR}$	20	mJ
Peak Diode Recovery dv/dt (Note 5)		dv/dt	4.5	V/ns
Power Dissipation ( $T_C=25^\circ\text{C}$ )	TO-220F1	$P_D$	52	W
	TO-220F2		62	
Linear Derating Factor above $T_C=25^\circ\text{C}$	TO-220F1		0.41	W/ $^\circ\text{C}$
	TO-220F2		0.31	
Junction Temperature		$T_J$	+150	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-55~+150	$^\circ\text{C}$

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Drain current limited by maximum junction temperature
3. Repetitive Rating: Pulse width limited by maximum junction temperature
4.  $L = 6.1\text{mH}$ ,  $I_{AS} = 16\text{A}$ ,  $V_{DD} = 50\text{V}$ ,  $R_G = 25\Omega$ , Starting  $T_J = 25^\circ\text{C}$
5.  $I_{SD} \leq 16\text{A}$ ,  $di/dt \leq 200\text{A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$

■ **THERMAL DATA**

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient		$\theta_{JA}$	62.5	$^\circ\text{C}/\text{W}$
Junction to Case	TO-220F1	$\theta_{JC}$	2.4	$^\circ\text{C}/\text{W}$
	TO-220F2		2.0	

**ELECTRICAL CHARACTERISTICS** ( $T_C=25^\circ\text{C}$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$I_D=250\mu\text{A}$ , $V_{GS}=0\text{V}$	500			V
Drain-Source Leakage Current	$I_{DSS}$	$V_{DS}=500\text{V}$ , $V_{GS}=0\text{V}$			1	$\mu\text{A}$
		$V_{DS}=400\text{V}$ , $V_{GS}=0\text{V}$ , $T_C=125^\circ\text{C}$			10	$\mu\text{A}$
Gate- Source Leakage Current	Forward	$I_{GSS}$				nA
	Reverse					
					-100	nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}$ , $I_D=250\mu\text{A}$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=10\text{V}$ , $I_D=8\text{A}$		0.31	0.38	$\Omega$
<b>DYNAMIC PARAMETERS</b>						
Input Capacitance	$C_{ISS}$	$V_{GS}=0\text{V}$ , $V_{DS}=25\text{V}$ , $f=1.0\text{MHz}$		1495	1945	pF
Output Capacitance	$C_{OSS}$			235	310	pF
Reverse Transfer Capacitance	$C_{RSS}$			20	30	pF
<b>SWITCHING PARAMETERS</b>						
Total Gate Charge	$Q_G$	$V_{GS}=10\text{V}$ , $V_{DS}=400\text{V}$ , $I_D=16\text{A}$ (Note 6, 7)		32	45	nC
Gate to Source Charge	$Q_{GS}$			8.5		nC
Gate to Drain Charge	$Q_{GD}$			14		nC
Turn-ON Delay Time	$t_{D(ON)}$	$V_{DD}=250\text{V}$ , $I_D=16\text{A}$ , $R_G=25\Omega$ (Note 6, 7)		40	90	ns
Rise Time	$t_R$			150	310	ns
Turn-OFF Delay Time	$t_{D(OFF)}$			65	140	ns
Fall-Time	$t_F$			80	170	ns
<b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b>						
Maximum Body-Diode Continuous Current	$I_S$				9.2	A
Maximum Body-Diode Pulsed Current	$I_{SM}$				37	A
Drain-Source Diode Forward Voltage	$V_{SD}$	$I_S=16\text{A}$ , $V_{GS}=0\text{V}$			1.4	V
Body Diode Reverse Recovery Time	$t_{RR}$	$I_S=16\text{A}$ , $V_{GS}=0\text{V}$ , $di_F/dt=100\text{A}/\mu\text{s}$ (Note 6)		490		ns
Body Diode Reverse Recovery Charge	$Q_{RR}$				5.0	

Notes: 6. Pulse Test: Pulse width  $\leq 300\mu\text{s}$ , Duty cycle  $\leq 2\%$ 


7. Essentially independent of operating temperature

■ TEST CIRCUITS AND WAVEFORMS


Gate Charge Test Circuit

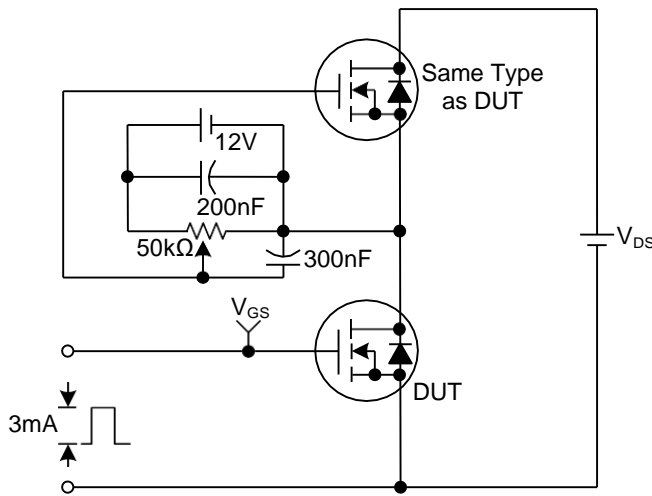


Gate Charge Waveforms

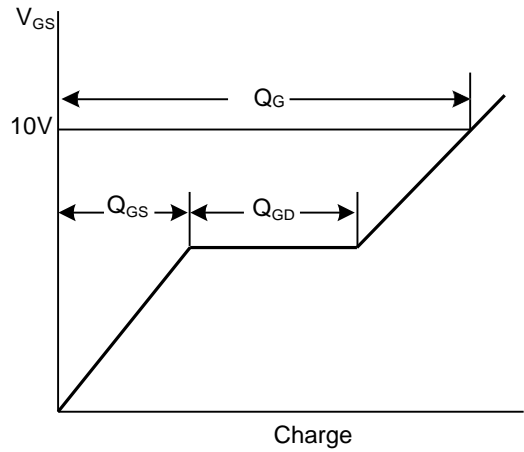


Resistive Switching Test Circuit

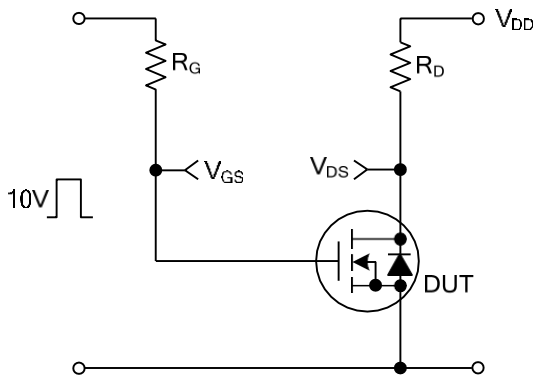


Resistive Switching Waveforms

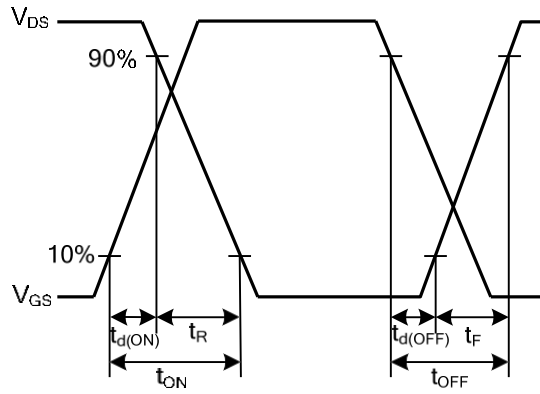

Unclamped Inductive Switching Test Circuit




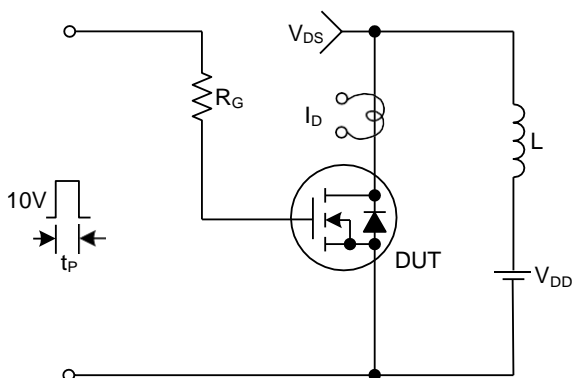


Unclamped Inductive Switching Waveforms

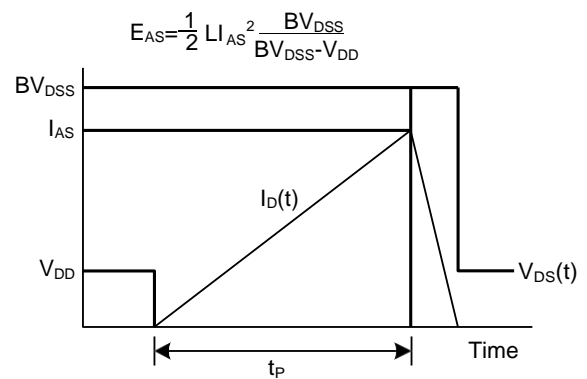

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

Peak Diode Recovery dv/dt Test Circuit & Waveforms

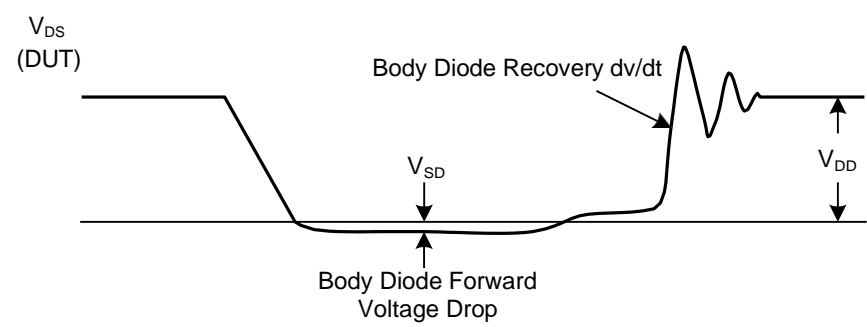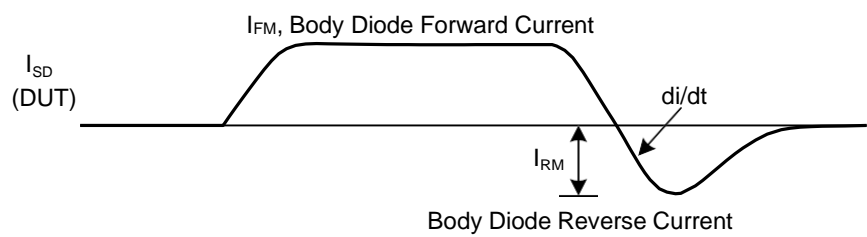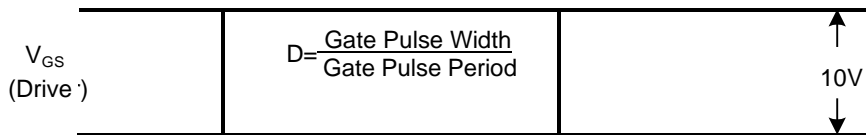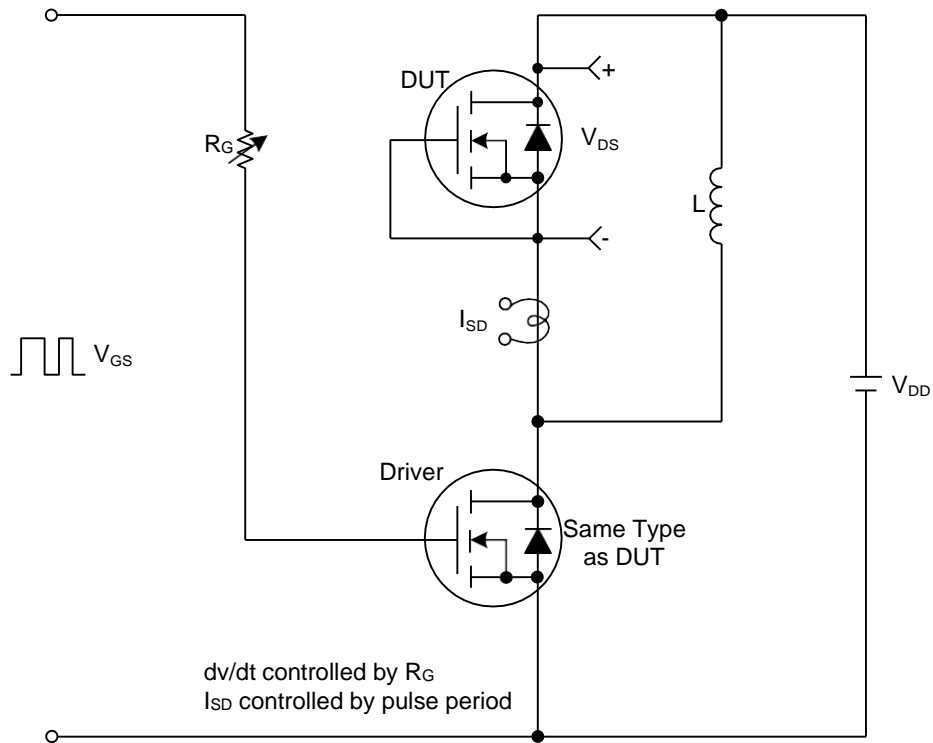

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.