



گروه فنی مهندسی جوش و برش مقدم

اعتماد از شما کیفیت و تخصص از ما



09153223758

051-37581400

<https://www.moghadamwelding>

<http://instagram.com/moghadam>

<https://t.me/moghadamwelding>

<https://whatsapp.com/channel>

<https://rubika.ir/moghadamwelding>



مشهد خیام شمالی 63 خیابان پردیس 3


برای کسب اطلاعات بیشتر بر روی لینک ها کلیک کنید

- 7 سال سابقه آموزش تعمیرات تخصصی دستگاه های جوش اینورتری تک فاز و 3 فاز
- 7 سال سابقه فروش قطعات الکترونیکی دستگاه جوش تک فاز و 3 فاز
- آموزش تخصصی تحلیل دستگاه های جوش اینورتری مختص ابراز فروشان
- آموزش تخصصی ابراز آلات شارژی

LM79XX Series 3-Terminal Negative Regulators

November 1994

General Description



The LM79XX series of 3-terminal regulators is available with fixed output voltages of b5V, b8V, b12V, and b15V. These devices need only one external component—a compensation capacitor at the output. The LM79XX series is packaged in the TO-220 power package and is capable of supplying 1.5A of output current.

These regulators employ internal current limiting safe area protection and thermal shutdown for protection against virtually all overload conditions.

Low ground pin current of the LM79XX series allows output voltage to be easily boosted above the preset value with a resistor divider. The low quiescent current drain of

these devices with a specified maximum change with line and load ensures good regulation in the voltage boosted mode.


For applications requiring other voltages, see LM137 data sheet.

Features

- ✓ Thermal, short circuit and safe area protection
 - ✓ High ripple rejection
 - ✓ 1.5A output current
 - ✓ 4% tolerance on preset output voltage

Connection Diagrams


TO-220 Package



Order Number LM7905CT, LM7912CT or LM7915CT
See NS Package Number TO3B

Typical Applications

Fixed Regulator



TL/H/7340-3

*Required if regulator is separated from filter capacitor by more than 3". For value given, capacitor must be solid tantalum. 25 mF aluminum electrolytic may be substituted.

[†]Required for stability. For value given, capacitor must be solid tantalum. 25 mF aluminum electrolytic may be substituted. Values given may be increased without limit.

For output capacitance in excess of 100 mF, a high current diode from input to output (1N4001, etc.) will protect the regulator from momentary input shorts.

Absolute Maximum Ratings (Note 1)


If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Input Voltage ($V_o \leq 5V$)	$b25V$	Input-Output Differential ($V_o \leq 5V$)	25V
($V_o \leq 12V$ and $b15V$)	$b35V$	($V_o \leq 12V$ and $b15V$)	30V
Power Dissipation (Note 2)		Internally Limited	
Operating Junction Temperature Range	$0^{\circ}C$ to $\leq 125^{\circ}C$		
Storage Temperature Range	$b65^{\circ}C$ to $\leq 150^{\circ}C$		
Lead Temperature (Soldering, 10 sec.)		230°C	

Electrical Characteristics Conditions unless otherwise noted: $I_{OUT} \leq 500$ mA, $C_{IN} \leq 2.2$ mF, $C_{OUT} \leq 1$ mF, $0^{\circ}C \leq T_J \leq 125^{\circ}C$, Power Dissipation ≤ 1.5 W.

Part Number		LM7905C			Units	
Output Voltage		$b5V$				
Input Voltage (unless otherwise specified)		$b10V$				
Symbol	Parameter	Conditions	Min	Typ	Max	
V_o	Output Voltage	$T_J \leq 25^{\circ}C$ $5\text{ mA} \leq I_{OUT} \leq 1\text{ A}$, $P \leq 15\text{ W}$	$b4.8$ $b4.75$ ($b20 \leq V_{IN} \leq b7$)	$b5.0$ $b5.25$	$b5.2$ $b5.25$	V
DV_o	Line Regulation	$T_J \leq 25^{\circ}C$, (Note 3)		8 2 ($b25 \leq V_{IN} \leq b7$)	50 15	mV mV
DV_o	Load Regulation	$T_J \leq 25^{\circ}C$, (Note 3) $5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$ $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$		15 5	100 50	mV mV
I_Q	Quiescent Current	$T_J \leq 25^{\circ}C$		1	2	mA
DI_Q	Quiescent Current Change	With Line With Load, $5\text{ mA} \leq I_{OUT} \leq 1\text{ A}$			0.5 0.5	mA mA
V_n	Output Noise Voltage	$T_A \leq 25^{\circ}C$, $10\text{ Hz} \leq f \leq 100\text{ Hz}$		125		mV
	Ripple Rejection	$f \leq 120\text{ Hz}$	54 ($b18 \leq V_{IN} \leq b8$)	66		dB V
	Dropout Voltage	$T_J \leq 25^{\circ}C$, $I_{OUT} \leq 1\text{ A}$		1.1		V
I_{OMAX}	Peak Output Current	$T_J \leq 25^{\circ}C$		2.2		A
	Average Temperature Coefficient of Output Voltage	$I_{OUT} \leq 5\text{ mA}$, $0^{\circ}C \leq T_J \leq 100^{\circ}C$		0.4		mV/ $^{\circ}C$

Typical Applications (Continued)

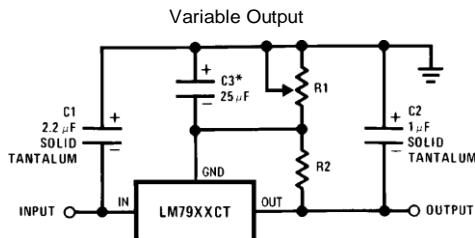

TLH/7340-2

*Improves transient response and ripple rejection. Do not increase beyond 50 mF.

$$R_1 = R_2$$

$$V_{OUT} = V_{SET} \left(\frac{R_2}{R_1} \right)$$

Select R_2 as follows:

- LM7905CT 300X
- LM7912CT 750X
- LM7915CT 1k

Electrical Characteristics (Continued) Conditions unless otherwise noted: $I_{OUT} \leq 500 \text{ mA}$, $C_{IN} \geq 2.2 \text{ mF}$, $C_{OUT} \geq 1 \text{ mF}$, $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$, Power Dissipation $\leq 1.5\text{W}$.


Part Number			LM7912C			LM7915C			Units	
Output Voltage			$b12V$			$b15V$				
Input Voltage (unless otherwise specified)			$b19V$			$b23V$				
Symbol	Parameter	Conditions	Min	Typ	Max	Min	Typ	Max		
V_O	Output Voltage	$T_J \leq 25^\circ\text{C}$ $5 \text{ mA} \leq I_{OUT} \leq 1 \text{ A}$, $P \leq 15\text{W}$	$b11.5$ $b11.4$ ($b27 \leq V_{IN} \leq b14.5$)	$b12.0$ $b12.6$ ($b30 \leq V_{IN} \leq b17.5$)	$b12.5$ $b14.4$ $b14.25$ ($b30 \leq V_{IN} \leq b17.5$)	$b14.4$ $b14.25$ ($b30 \leq V_{IN} \leq b17.5$)	$b15.0$ $b15.75$ ($b30 \leq V_{IN} \leq b17.5$)	$b15.6$ $b15.75$ ($b30 \leq V_{IN} \leq b17.5$)	V V V	
ΔV_O	Line Regulation	$T_J \leq 25^\circ\text{C}$, (Note 3)		5 3 ($b22 \leq V_{IN} \leq b16$)	80 30 ($b30 \leq V_{IN} \leq b14.5$)		5 3 ($b26 \leq V_{IN} \leq b20$)	100 50 ($b30 \leq V_{IN} \leq b17.5$)	mV mV mV V	
ΔV_O	Load Regulation	$T_J \leq 25^\circ\text{C}$, (Note 3) $5 \text{ mA} \leq I_{OUT} \leq 1.5 \text{ A}$ $250 \text{ mA} \leq I_{OUT} \leq 750 \text{ mA}$		15 5	200 75		15 5	200 75	mV mV	
I_Q	Quiescent Current	$T_J \leq 25^\circ\text{C}$			1.5 3		1.5 3	3	mA	
ΔI_Q	Quiescent Current Change	With Line			0.5			0.5	mA	
		With Load, $5 \text{ mA} \leq I_{OUT} \leq 1 \text{ A}$			0.5			0.5	V	
									mA	
V_n	Output Noise Voltage	$T_A \leq 25^\circ\text{C}$, $10 \text{ Hz} \leq f \leq 100 \text{ Hz}$			300			375	mV	
	Ripple Rejection	$f \leq 120 \text{ Hz}$		54 ($b25 \leq V_{IN} \leq b15$)	70		54 ($b30 \leq V_{IN} \leq b17.5$)	70	dB V	
	Dropout Voltage	$T_J \leq 25^\circ\text{C}$, $I_{OUT} \leq 1 \text{ A}$			1.1			1.1	V	
I_{OMAX}	Peak Output Current	$T_J \leq 25^\circ\text{C}$			2.2			2.2	A	
	Average Temperature Coefficient of Output Voltage	$I_{OUT} \leq 5 \text{ mA}$, $0^\circ\text{C} \leq T_J \leq 100^\circ\text{C}$			b0.8			b1.0	mV/ $^\circ\text{C}$	

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee Specific Performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics.

Note 2: Refer to Typical Performance Characteristics and Design Considerations for details.

Note 3: Regulation is measured at a constant junction temperature by pulse testing with a low duty cycle. Changes in output voltage due to heating effects must be taken into account.

Typical Applications (Continued)

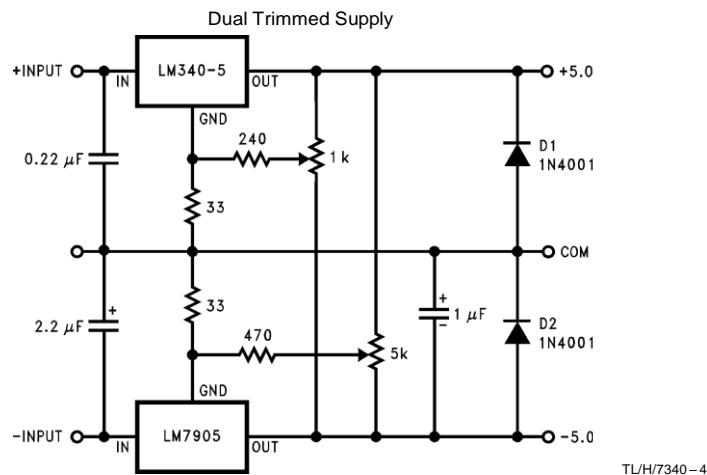

TL/H/7340-4

Design Considerations

The LM79XX fixed voltage regulator series has thermal overload protection from excessive power dissipation, internal short circuit protection which limits the circuit's maximum current, and output transistor safe-area compensation for reducing the output current as the voltage across the pass transistor is increased.

Although the internal power dissipation is limited, the junction temperature must be kept below the maximum specified temperature (125°C) in order to meet data sheet specifications. To calculate the maximum junction temperature or heat sink required, the following thermal resistance values should be used:

Package	Typ i_{JC} °C/W	Max i_{JC} °C/W	Typ i_{JA} °C/W	Max i_{JA} °C/W
TO-220	3.0	5.0	60	40

$$P_{D\text{ MAX}}^e = \frac{T_{J\text{ Max}} - T_A}{i_{JC} + i_{CA}}$$

$i_{CA} = i_{CS} + i_{SA}$ (without heat sink)

Solving for T_J :

$$T_J = T_A + P_D (i_{JC} + i_{CA})$$

$\approx T_A + P_D i_{JA}$ (without heat sink)

Where:

T_J = Junction Temperature

T_A = Ambient Temperature

P_D = Power Dissipation

i_{JA} = Junction-to-Ambient Thermal Resistance

i_{JC} = Junction-to-Case Thermal Resistance

i_{CA} = Case-to-Ambient Thermal Resistance

i_{CS} = Case-to-Heat Sink Thermal Resistance


i_{SA} = Heat Sink-to-Ambient Thermal Resistance

Typical Applications (Continued)

Bypass capacitors are necessary for stable operation of the LM79XX series of regulators over the input voltage and output current ranges. Output bypass capacitors will improve the transient response by the regulator.

The bypass capacitors, (2.2 mF on the input, 1.0 mF on the output) should be ceramic or solid tantalum which have good high frequency characteristics. If aluminum electrolytics are used, their values should be 10 mF or larger. The bypass capacitors should be mounted with the shortest leads, and if possible, directly across the regulator terminals.

High Stability 1 Amp Regulator

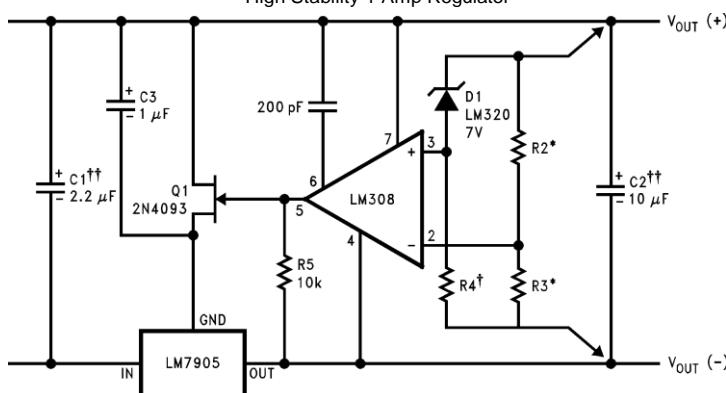

TLH/7340-5


Load and line regulation $\leq 0.01\%$ temperature stability $\leq 0.2\%$

†Determine Zener current

‡Solid tantalum


*Select resistors to set output voltage. 2 ppm/ $^{\circ}\text{C}$ tracking suggested

Typical Applications (Continued)

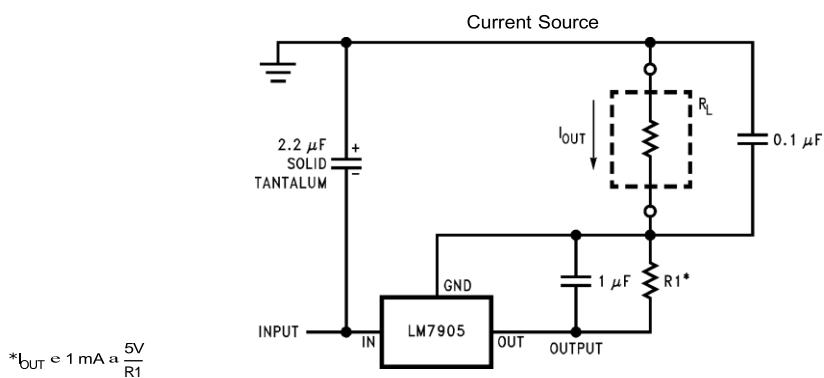

* $b_{BUR} \approx 1 \text{ mA} \approx \frac{5V}{R_1}$

TL/H/7340-7

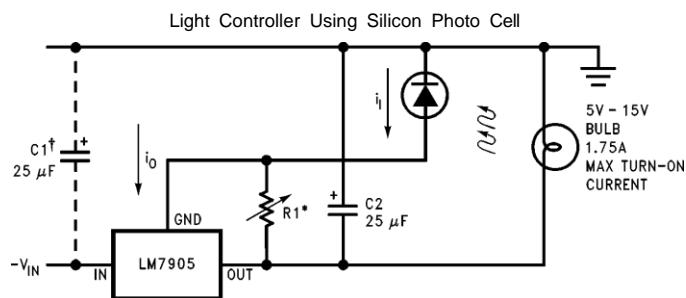


*Lamp brightness increase until $i_O = i_Q (\approx 1 \text{ mA}) \approx 5V/R_1$.

^tNecessary only if raw supply filter capacitor is more than 2" from LM7905CT

TL/H/7340-8


Typical Applications (Continued)

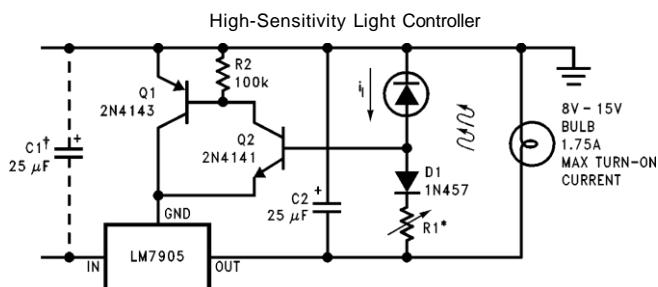

TL/H/7340-9

*Lamp brightness increases until $i_l \geq 5V/R1$ (i_l can be set as low as 1 mA)

†Necessary only if raw supply filter capacitor is more than 2" from LM7905

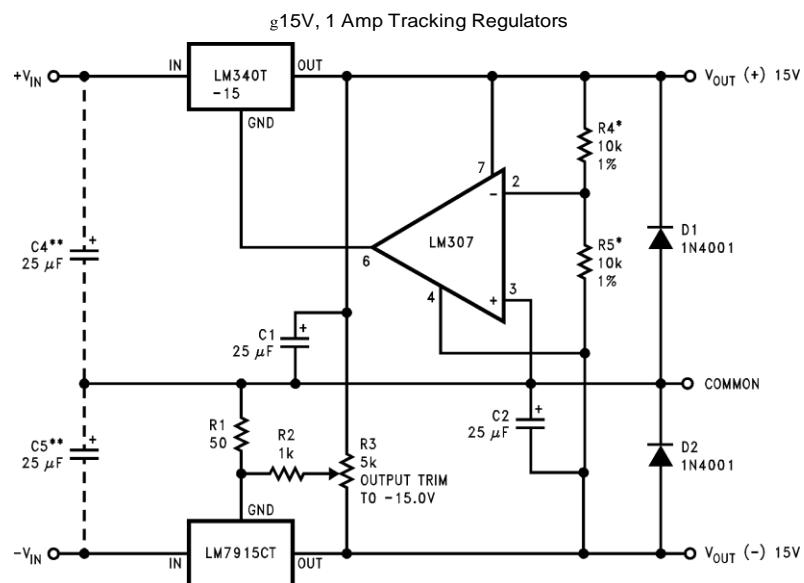


TL/H/7340-1

Load Regulation at $D_{L1} \geq 1A$	(b15) 40 mV	(a15) 2 mV
Output Ripple, $C_{IN} \geq 3000 \mu F$, $I_L \geq 1A$	100 mVrms	100 mVrms
Temperature Stability	50 mV	50 mV
Output Noise 10 Hz $\leq f \leq 10$ kHz	150 mVrms	150 mVrms

*Resistor tolerance of R4 and R5 determine matching of (a) and (b) outputs.

**Necessary only if raw supply filter capacitors are more than 3" from regulators.


Schematic Diagrams

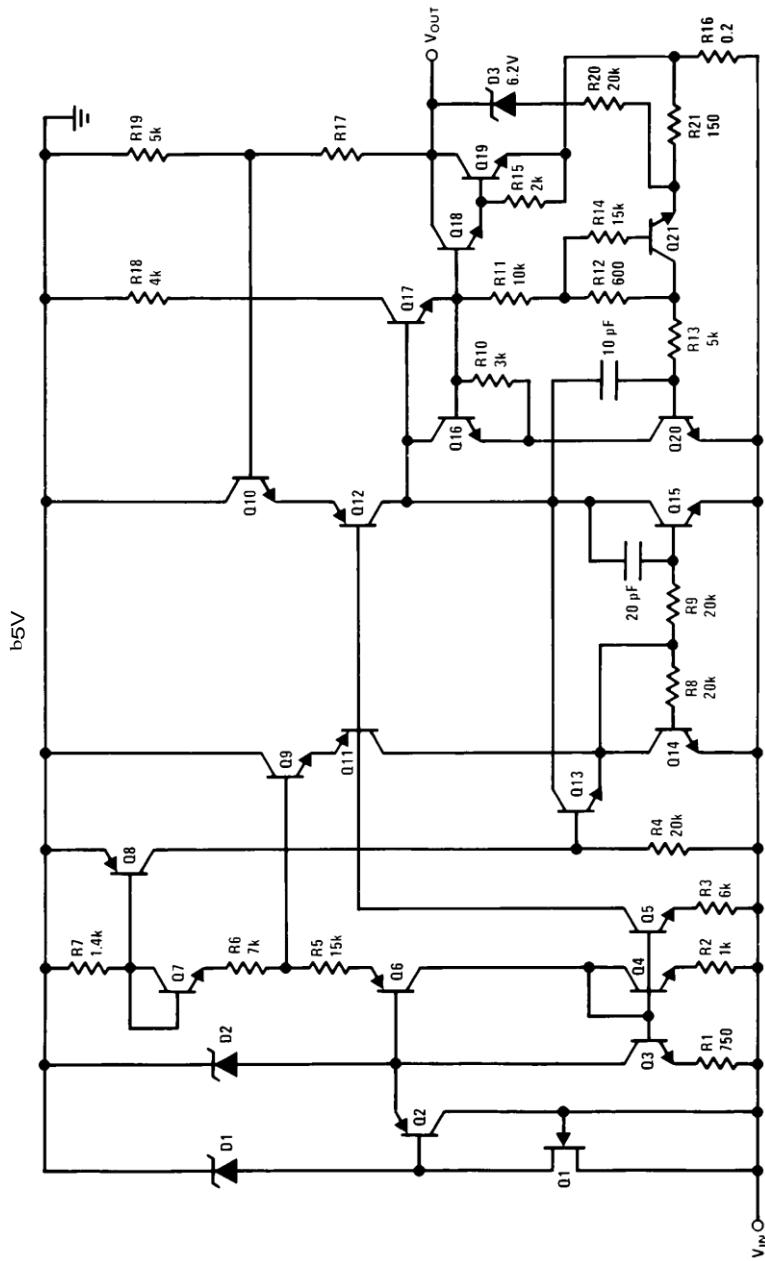

TLH7340-12


Schematic Diagrams (Continued)

TL/H/7340-13

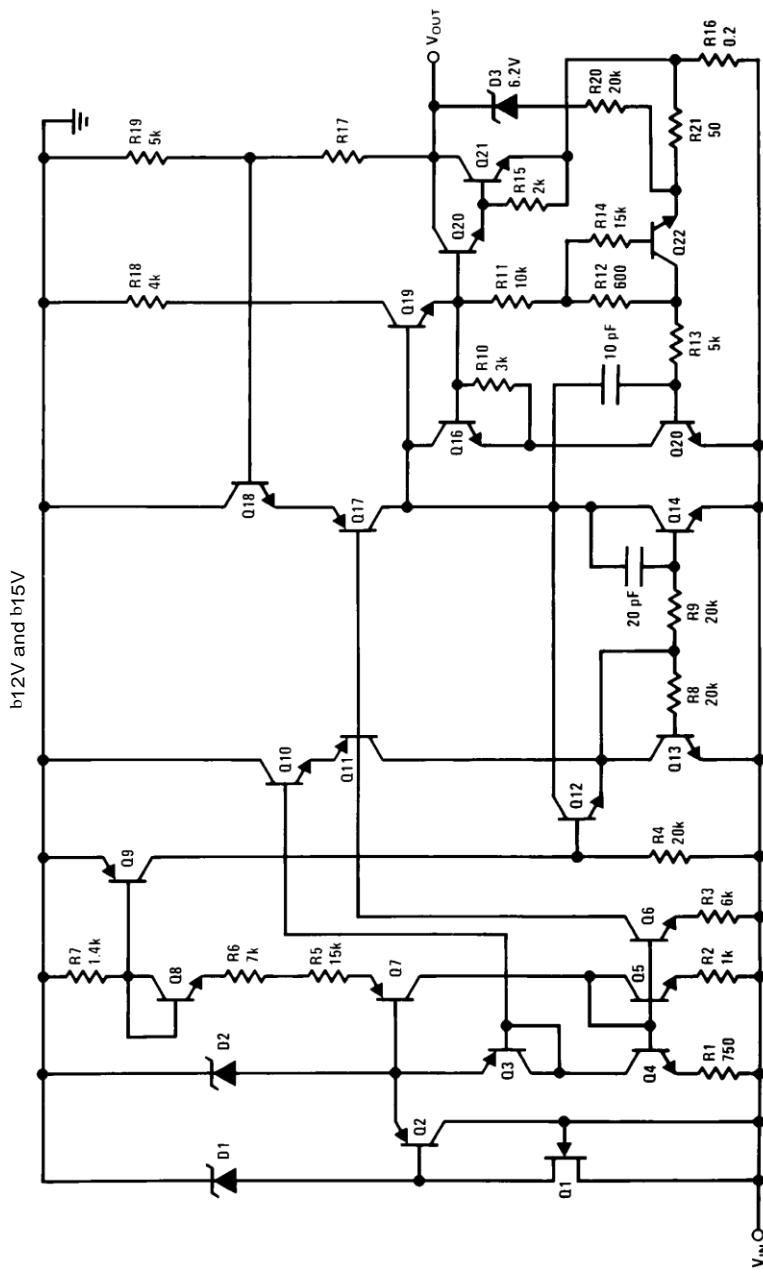

LM79XX Series 3-Terminal Negative Regulators

Physical Dimensions inches (millimeters)

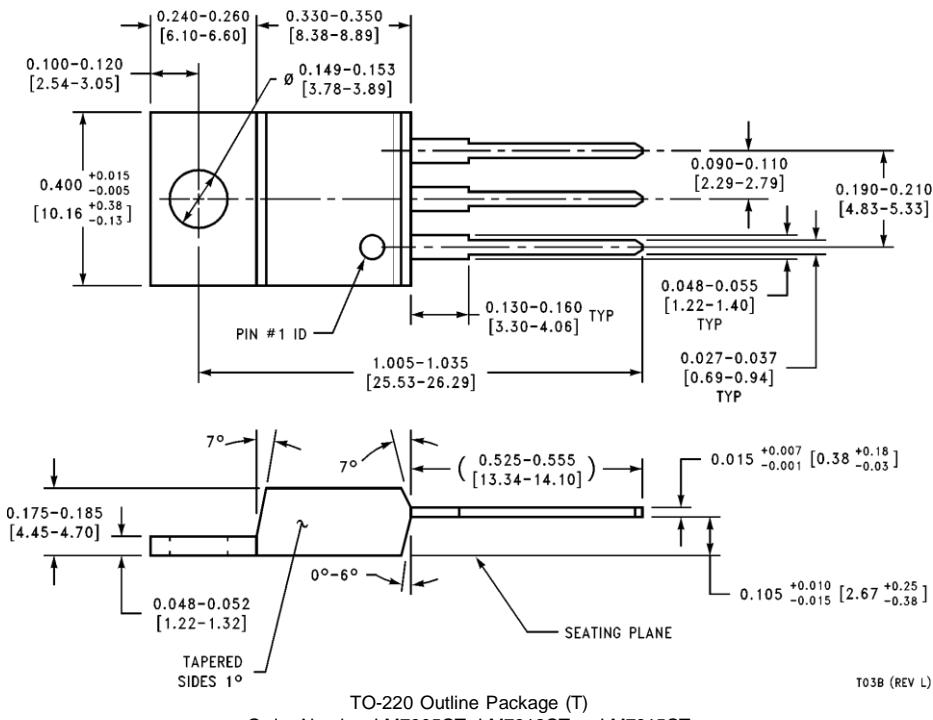

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor
Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor
Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor
Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor
Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2406

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.