



گروه فنی مهندسی جوش و برش مقدم

اعتماد از شما کیفیت و تخصص از ما



09153223758

051-37581400

<https://www.moghadamwelding>

<http://instagram.com/moghadam>

<https://t.me/moghadamwelding>

<https://whatsapp.com/channel>

<https://rubika.ir/moghadamwelding>



مشهد خیام شمالی 63 خیابان پردیس 3



برای کسب اطلاعات بیشتر بر روی لینک ها کلیک کنید

- 7 سال سابقه آموزش تعمیرات تخصصی دستگاه های جوش اینورتری تک فاز و 3 فاز
- 7 سال سابقه فروش قطعات الکترونیکی دستگاه جوش تک فاز و 3 فاز
- آموزش تخصصی تحلیل دستگاه های جوش اینورتری مختص ابراز فروشان
- آموزش تخصصی ابراز آلات شارژی

Sensitive Gate Silicon Controlled Rectifiers

Features

- ◆ Repetitive Peak Off-State Voltage : 400V
- ◆ R.M.S On-State Current ($I_{T(RMS)} = 0.8 \text{ A}$)
- ◆ Low On-State Voltage (1.2V(Typ.)@ I_{TM})

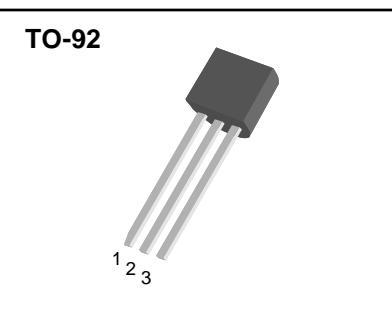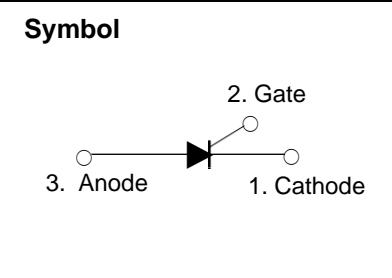

General Description

Sensitive triggering SCR is suitable for the application where gate current limited such as small motor control, gate driver for large SCR, sensing and detecting circuits.

Absolute Maximum Ratings ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Condition	Ratings	Units
V_{DRM}	Repetitive Peak Off-State Voltage		400	V
$I_{T(AV)}$	Average On-State Current	Half Sine Wave : $T_C = 74^\circ\text{C}$	0.5	A
$I_{T(RMS)}$	R.M.S On-State Current	All Conduction Angle	0.8	A
I_{TSM}	Surge On-State Current	1/2 Cycle, 60Hz, Sine Wave Non-Repetitive	10	A
I^2t	I^2t for Fusing	$t = 8.3\text{ms}$	0.415	A^2s
P_{GM}	Forward Peak Gate Power Dissipation		2	W
$P_{G(AV)}$	Forward Average Gate Power Dissipation		0.1	W
I_{FGM}	Forward Peak Gate Current		1	A
V_{RGM}	Reverse Peak Gate Voltage		5.0	V
T_J	Operating Junction Temperature		- 40 ~ 125	$^\circ\text{C}$
T_{STG}	Storage Temperature		- 40 ~ 150	$^\circ\text{C}$

MCR100-6

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Items	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$V_{AK} = V_{DRM}$ or V_{RRM} ; $R_{GK} = 1000 \Omega$ $T_C = 25^\circ\text{C}$ $T_C = 125^\circ\text{C}$	— —	— —	10 200	μA
V_{TM}	Peak On-State Voltage (1)	($I_{TM} = 1 \text{ A}$, Peak)	—	1.2	1.7	V
I_{GT}	Gate Trigger Current (2)	$V_{AK} = 6 \text{ V}$, $R_L = 100 \Omega$ $T_C = 25^\circ\text{C}$ $T_C = -40^\circ\text{C}$	— —	— —	200 500	μA
V_{GT}	Gate Trigger Voltage (2)	$V_D = 7 \text{ V}$, $R_L = 100 \Omega$ $T_C = 25^\circ\text{C}$ $T_C = -40^\circ\text{C}$	— —	— —	0.8 1.2	V
V_{GD}	Non-Trigger Gate Voltage (1)	$V_{AK} = 12 \text{ V}$, $R_L = 100 \Omega$ $T_C = 125^\circ\text{C}$	0.2	—	—	V
dv/dt	Critical Rate of Rise Off-State Voltage	$V_D = \text{Rated } V_{DRM}$, Exponential waveform, $R_{GK} = 1000 \Omega$ $T_J = 125^\circ\text{C}$	500	800	—	V/ μs
di/dt	Critical Rate of Rise On-State Current	$I_{PK} = 20 \text{ A}$; $P_W = 10 \mu\text{s}$; $di_G/dt = 1 \text{ A}/\mu\text{s}$ $I_{gt} = 20 \text{ mA}$	—	—	50	A/ μs
I_H	Holding Current	$V_{AK} = 12 \text{ V}$, Gate Open Initiating Current = 20mA $T_C = 25^\circ\text{C}$ $T_C = -40^\circ\text{C}$	— —	2 —	5.0 10	mA
$R_{th(j-c)}$	Thermal Impedance	Junction to case	—	—	60	$^\circ\text{C/W}$
$R_{th(j-a)}$	Thermal Impedance	Junction to Ambient	—	—	150	$^\circ\text{C/W}$

※ Notes :

1. Pulse Width $\leq 1.0 \text{ ms}$, Duty cycle $\leq 1\%$
2. Does not include R_{GK} in measurement.



MCR100-6

Fig 1. Gate Characteristics

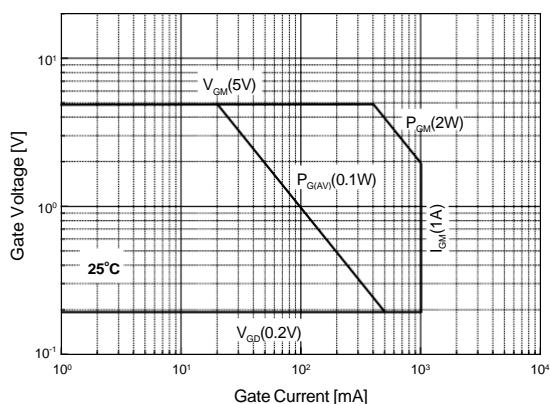


Fig 2. Maximum Case Temperature

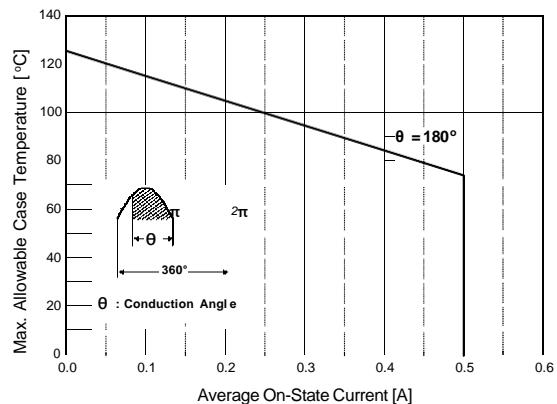


Fig 3. Typical Forward Voltage

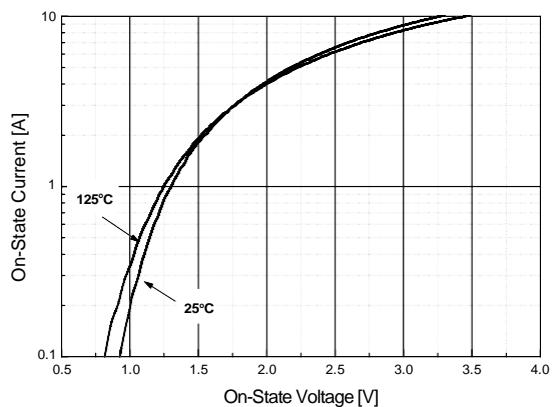


Fig 4. Thermal Response

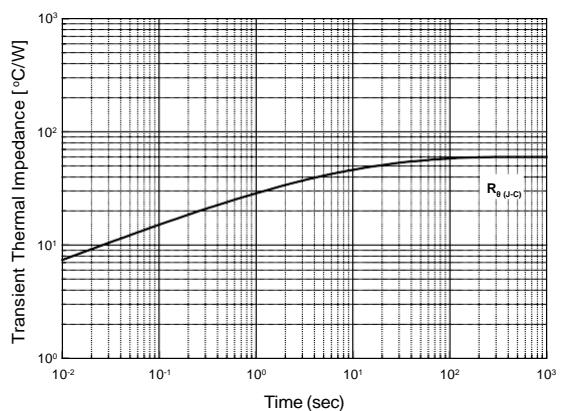


Fig 5. Typical Gate Trigger Voltage vs. Junction Temperature


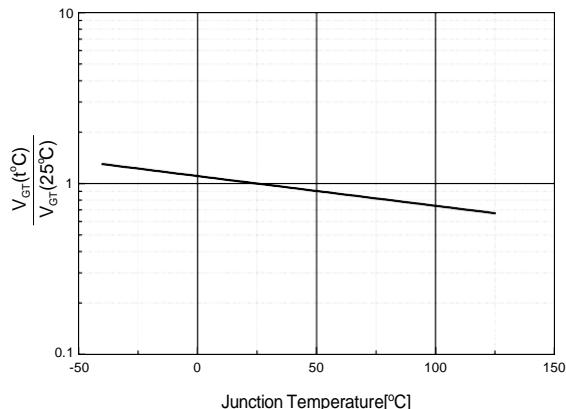


Fig 6. Typical Gate Trigger Current vs. Junction Temperature

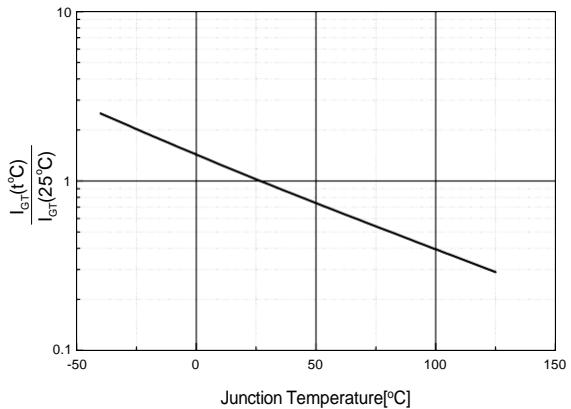

MCR100-6

Fig 7. Typical Holding Current


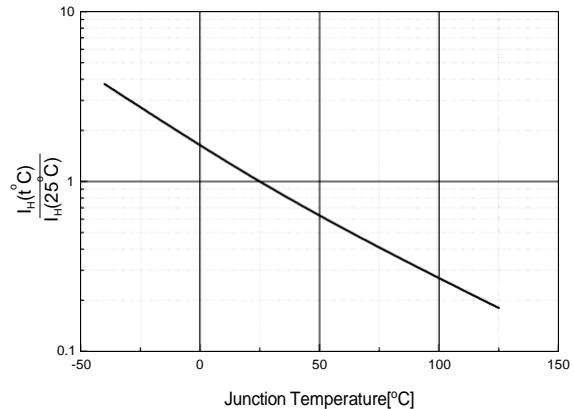


Fig 8. Power Dissipation

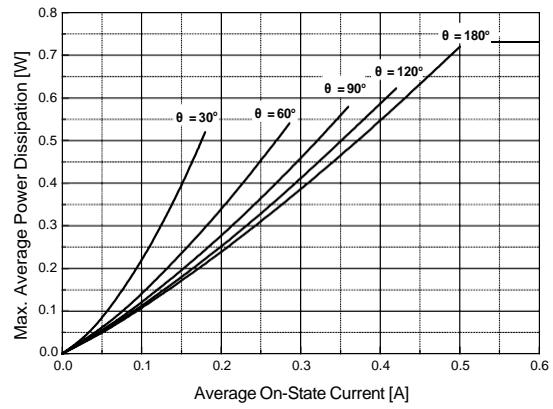

MCR100-6

TO-92 Package Dimension

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		4.2			0.165	
B			3.7			0.146
C	4.43		4.83	0.174		0.190
D	14.07		14.87	0.554		0.585
E			0.4			0.016
F	4.43		4.83	0.174		0.190
G			0.45			0.017
H		2.54			0.100	
I		2.54			0.100	
J	0.33		0.48	0.013		0.019

